

# Research on the Physical Model of River Sedimentation: A Case Study in Buah River, Palembang, Indonesia

*by Achmad Syarifudin, Herlin Taufik Utama*

---

**Submission date:** 07-Jul-2022 08:46AM (UTC+0700)

**Submission ID:** 1867512892

**File name:** ID-4076\_IJPSAT\_Article\_Tama.docx (85.29K)

**Word count:** 2525

**Character count:** 12107

# 1 *Research on the Physical Model of River Sedimentation: A Case Study in Buah River, Palembang, Indonesia*

1  
Herlin Taufik Utama  
Civil and Environment Engineering Faculty,  
Universitas Bina Darma  
Indonesia

Achmad Syarifudin  
Civil and Environment Engineering Faculty,  
Universitas Bina Darma  
Indonesia

[achmad.syarifudin@binadarma.ac.id](mailto:achmad.syarifudin@binadarma.ac.id)

**Abstract**— The research was conducted to see the flow phenomenon in the river with hydraulic modeling, namely by using the river channel scale model in the Bina Darma River and Hydraulics laboratory.

The Buah River, with the main river being 7.93 km long, has many meanders and a river wall reinforcement has been built. The average grain diameter ( $d_{50}$ ) used in this study was 0.025 mm based on the sieve analysis carried out as sediment material at the time of modeling.

The results showed that the sedimentation at the bottom of the Buah river occurs at the distance between 200 cm to 400 cm, which is 0.2 cm to 3.00 cm with a time of 25 minutes to 30 minutes of experimentation. The largest sedimentation occurred during the 30 minute experiment with a buildup of 0.5 cm.

so it is said that the optimum condition is sedimentation of 0.5 cm in the model and with a scale of 1: 100, the deposition that occurred in the field (prototype) was 0.5 m.

**Keywords**—The Buah river; Phenomena, Grain diameter; Sedimentation rate

## I. INTRODUCTION

The condition of the geography of Palembang city is a relatively at, so at certain locations it often experiences puddles (floods) caused by the flow of rainwater (run-off) which cannot be accommodated by the channel. In addition, at certain locations, puddles (floods) are also caused by the runoff of the Musi River. Floods that occurred in the city of Palembang caused problems for the Government to evaluate the existing drainage channels. The rainwater drainage channels have been built but need to be reviewed and evaluated to function properly. (Achmad Syarifudin, 2022).

Palembang city has 108 tributaries. There are 4 major rivers that cross the city of Palembang, namely the Musi River, Komering River, Ogan River, and Keramasan River. Of the 4 major rivers above the Musi River is the largest river with an average width of 504 meters and a maximum width of 1,350 meters around Kemaro Island. (Achmad Syarifudin, 2018).

Based on the division of river areas, there are 21 sub-watersheds, but only 18 sub-watersheds in the city of Palembang which empties directly into the Musi river in the city of Palembang, namely the Rengas Lacak, Gandus, Lambidaro, Boang, Sekanak, Bendung, Lawang Kidul, Buah, Juaro, Batang, Sei Lively, Keramasan, Kertapati, Kedukan Ulu, Aur, Sriguna, Jakabaring and Plaju. (Department of PUPR of Palembang city, 2018; Achmad Syarifudin, 2022).

Various efforts have been made, but these efforts have not been optimal in overcoming the problem of puddles (floods). These efforts are in the form of maintaining city drainage channels, cleaning river channels that cross the city. Likewise, studies related to flood control in urban areas, construction of flood control facilities have been made and several policies and regulations have been issued for flood control. These efforts turned out to be outpaced by the development of the city. (Achmad Syarifudin, 2022).

The urban drainage system which always experiences flooding in the city of Palembang every year, among others, is the Buah watershed area. Buah river with a main river length of 7.93 km, there are many meanders and river wall reinforcement has been built. The fruit sub-watershed with an area of 10.79 km<sup>2</sup> is generally a residential, industrial and swamp area. (Palembang City

PUPR Service, in Ayu Marlina and Reni Andayani, 2020). For this reason, it is necessary to conduct a physical model approach to the depth erosion in teh Bah river.

The complexity of the river system can be seen from the various components of the river, for example the shape of the river flow and branching, river bed form, river morphology, and river ecosystem. The river branch will resemble a river tree starting from the first order to the nth order river. The river bed formation, when examined at a glance, is very difficult to identify and characterize. The shape of the meander groove is influenced by the longitudinal slope of the landscape, the type of river bed material, and the vegetation in the area (Maryono, 2007; Achmad Syarifudin, 2022).

A river or open channel is a channel where water flows with a free water level. In an open channel, for example a river (natural channel), the flow variable is very irregular with respect to time and space. These variables are the cross section of the channel, roughness, bottom slope, curvature of the flow rate and so on (Triatmodjo, 2003).

## II. RESEARCH METHODS

The research was carried out using the Hydraulics and Rivers laboratory at Bina Darma University with a laboratory scale (scale model) as shown in Figure 1.



Fig. 1. Research model in the laboratory

### A. Materials and tools

The materials used in this study include:

- the material used as the Buah river material is sand with a diameter of 0.025 mm to 2.36 mm. Before being used as experimental material, a sieve analysis was carried out to obtain a uniform grain diameter.
- to move the flow in the channel is water as well as to move sediment grains,
- The specifications of the tool are as follows:
  - flexiglass for standard flume
  - length of the channels: 4.00 m
  - Width: 0.15 m
  - Depth: 0.20 m
- the instrument meter used for scouring depth value.
- Photo camera to take pictures when doing the experiment.
- Video recorder to record experiment implementation.

### B. Research preparation

This research was conducted using laboratory approach method with various variations in the flow rate, flow rate and time. The standard channel (flume standard), most of its components are made of glass and have important parts, namely:

- a. The aqueduct, the main place in this experiment, to drain the water. In the form of water flume with a size of 4.00 x 20 x 15 meters. This channel has transparent walls for easy to observed phenomena of the scoring depth,

- b. A reservoir that functions to accommodate water that will be flowed into the channel or out,
- c. Water pump, used to pump water so that it can be distributed along the gutter,
- d. Discharge faucet, functions to regulate the discharge that comes out of the pump. Has a discharge scale of 6-9 range,
- e. The tilt adjustment wheel, located upstream and downstream of the channel, can be manually turned to adjust the desired bed slope. This bed slope adjustment wheel has a scale for maximum positive bed slope + 3.0% and maximum negative bed slope - 1.0%.

### III. RESULTS AND DISCUSSION

The results of the study get the value of the depth of erosion for each experimental length as shown in the following table and figure below:

TABLE I. EXPERIMENTAL RESULTS IN THE LABORATORY

No.	t (time) minute	ds (Sedimentation) cm	x (Distance) cm	x/t	d/t
1	5	0.1	216	43.20	0.02
2	5	0.2	233	46.60	0.04
3	5	0.2	269	53.80	0.04
4	5	0.3	342	68.40	0.06
5	5	0.1	365	73.00	0.02
6	10	0.2	77	7.70	0.02
7	10	0.2	201	20.10	0.02
8	10	0.3	242	24.20	0.03
9	10	0.4	272	27.20	0.04
10	10	0.4	268	26.80	0.04
11	10	0.3	289	28.90	0.03
12	10	0.2	307	30.70	0.02
13	10	0.5	395	39.50	0.05
14	15	0.1	140	9.33	0.01
15	15	0.2	200	13.33	0.01
16	15	0.1	217	14.47	0.01
17	15	0.3	222	14.80	0.02
18	15	0.1	246	16.40	0.01
19	15	0.2	259	17.27	0.01
20	15	0.3	267	17.80	0.02
21	15	0.2	275	18.33	0.01
22	15	0.2	293	19.53	0.01
23	15	0.2	306	20.40	0.01
24	15	0.1	316	21.07	0.01
25	15	0.3	333	22.20	0.02
26	20	0.2	165	8.25	0.01
27	20	0.1	212	10.60	0.01
28	20	0.1	219	10.95	0.01
29	20	0.3	228	11.40	0.02
30	20	0.3	236	11.80	0.02

31	20	0.4	251	12.55	0.02
32	20	0.1	257	12.85	0.01
33	20	0.3	262	13.10	0.02
34	20	0.2	271	13.55	0.01
35	20	0.1	275	13.75	0.01
36	20	0.1	284	14.20	0.01
37	20	0.2	291	14.55	0.01
38	20	0.1	308	15.40	0.01
39	20	0.1	318	15.90	0.01
40	20	0.2	322	16.10	0.01
41	20	0.2	330	16.50	0.01
42	20	0.2	339	16.95	0.01
43	20	0.1	368	18.40	0.01
44	20	0.2	386	19.30	0.01
45	20	0.4	394	19.70	0.02
46	25	0.2	175	7.00	0.01
47	25	0.1	186	7.44	0.00
48	25	0.1	193	7.72	0.00
49	25	0.2	220	8.80	0.01
50	25	0.4	227	9.08	0.02
51	25	0.4	239	9.56	0.02
52	25	0.4	245	9.80	0.02
53	25	0.5	253	10.12	0.02
54	25	0.3	261	10.44	0.01
55	25	0.2	268	10.72	0.01
56	25	0.2	341	13.64	0.01
57	25	0.1	373	14.92	0.00
58	25	0.2	382	15.28	0.01
59	25	0.4	390	15.60	0.02
60	25	0.5	395	15.80	0.02
61	30	0.1	153	5.10	0.00
62	30	0.1	177	5.90	0.00
63	30	0.5	206	6.87	0.02
64	30	0.2	228	7.60	0.01
65	30	0.4	231	7.70	0.01
66	30	0.3	253	8.43	0.01
67	30	0.4	264	8.80	0.01
68	30	0.2	296	9.87	0.01
69	30	0.1	321	10.70	0.00
70	30	0.2	372	12.40	0.01

71	30	0.3	384	12.80	0.01
72	30	0.3	393	13.10	0.01
73	30	0.7	395	13.17	0.02
74	30	1	397	13.23	0.03

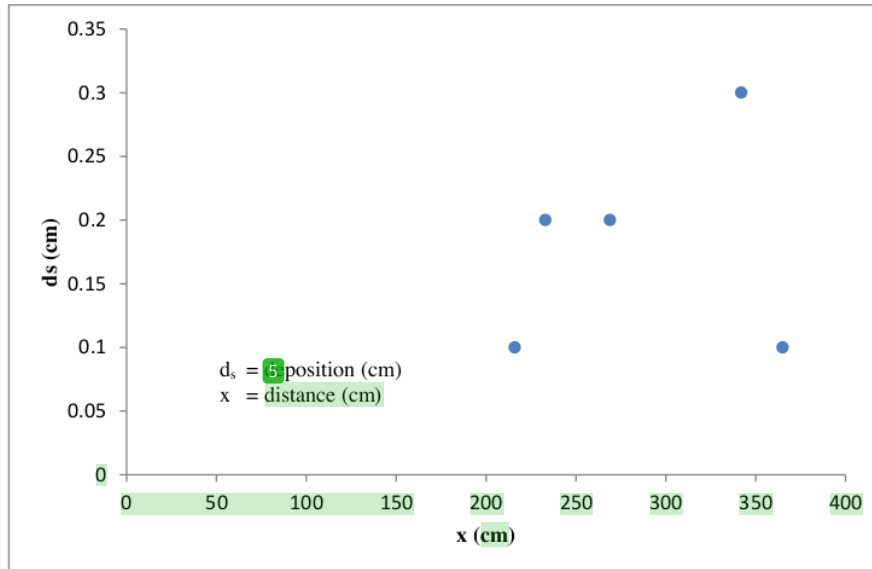


Fig. 2. Plotting The Results of the sedimentation ( $d_s$ ) during the "running test" for 5 minutes

From Figure 2 above, it can be said that at the estuary of the river model, there is no sediment buildup but at the distance of 200 cm until almost 500 cm, there is 0.2 cm sedimentation. The length of the experiment is 5 minutes.

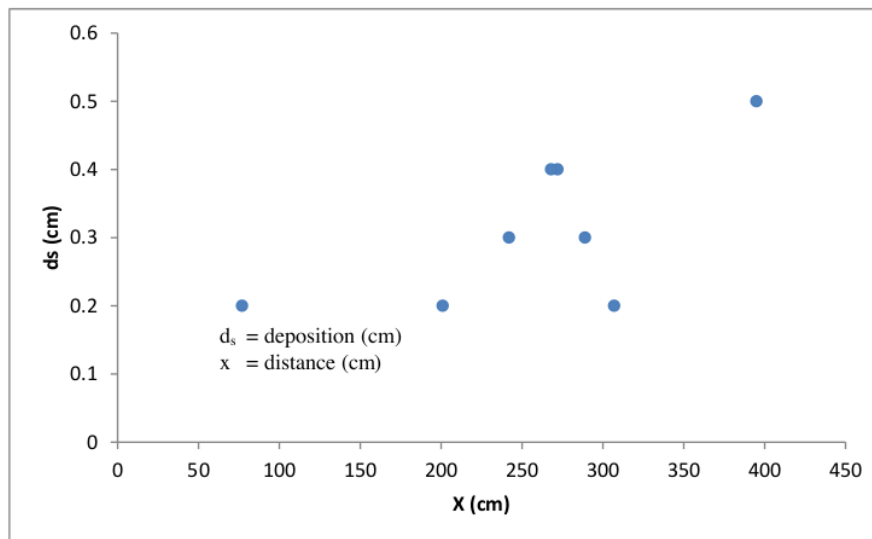


Fig. 3. Plotting The Results of the sedimentation ( $d_s$ ) during the "running test" for 10 minutes

From Figure 3 with an experimental time of 10 minutes, there is a buildup of sediment at the beginning of the river which then increases to a distance of 400 cm in the model. it can be said that the estuary river model obtained an sedimentation maximum of 400 cm.

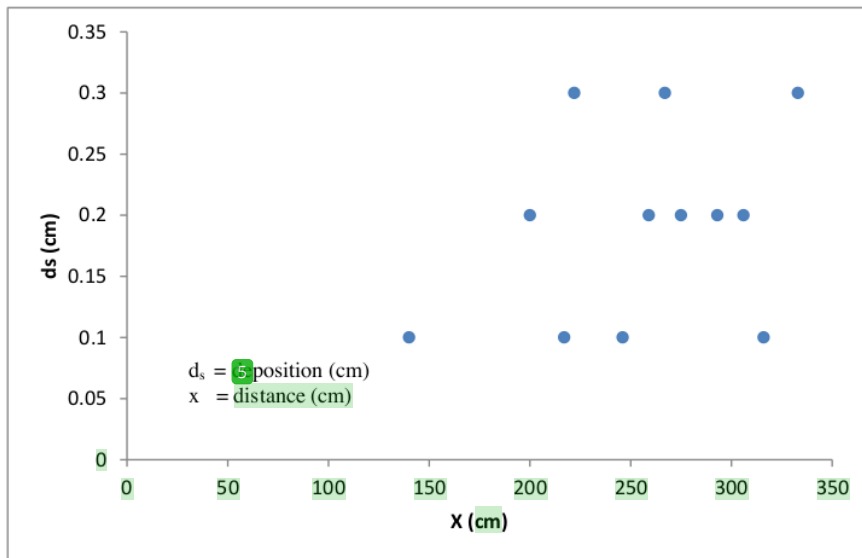


Fig. 4. Plotting The Results of the erosion depth (de) during the "running test" for 15 minutes

From Figure 4, with an experimental time of 15 minutes on the river estuary model, the sedimentation is 0.1cm and then continues to increases at a distance of almost 350 cm of 0.2 cm.

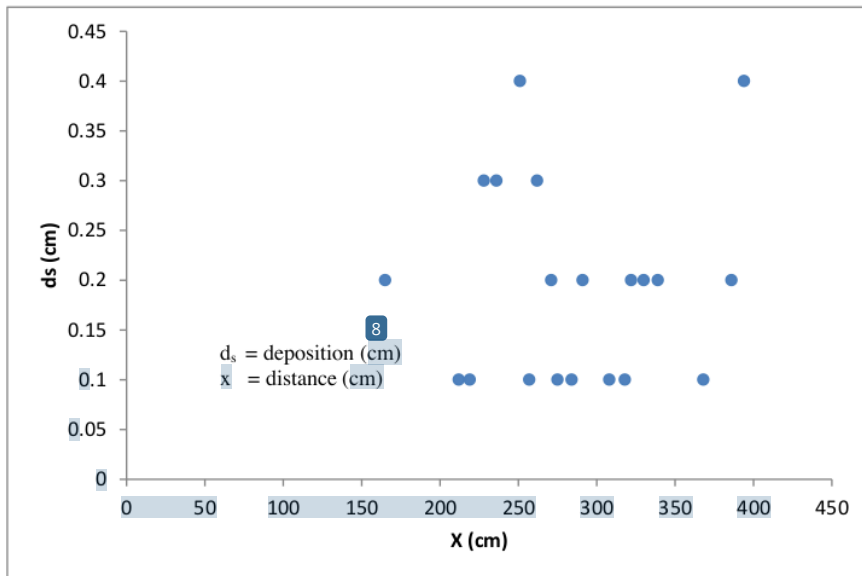


Fig. 5. Plotting The Results of the sedimentation (ds) during the "running test" for 20 minutes

From Figure 5 with an experimental time of 20 minutes on the river estuary model, the sedimentation is 0.2 cm and then discontinues at a distance of 400 cm by 0.4 cm.

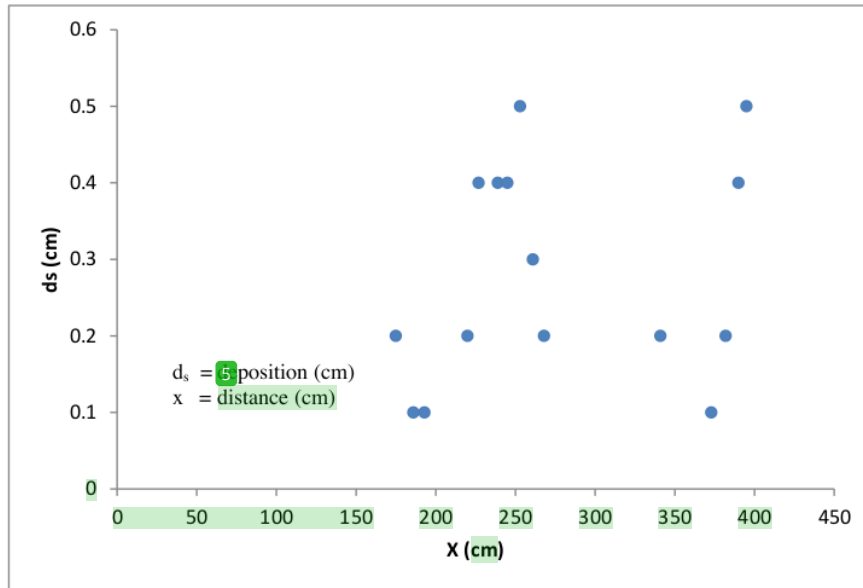


Fig. 6. Plotting The Results of the erosion depth (de) during the "running test" for 25 minutes

From Figure 6 with an experimental time of 25 minutes on the river estuary model, the erosion depth is 0.2 cm and then continues to increase at a distance of 400 cm by 0.5 cm.

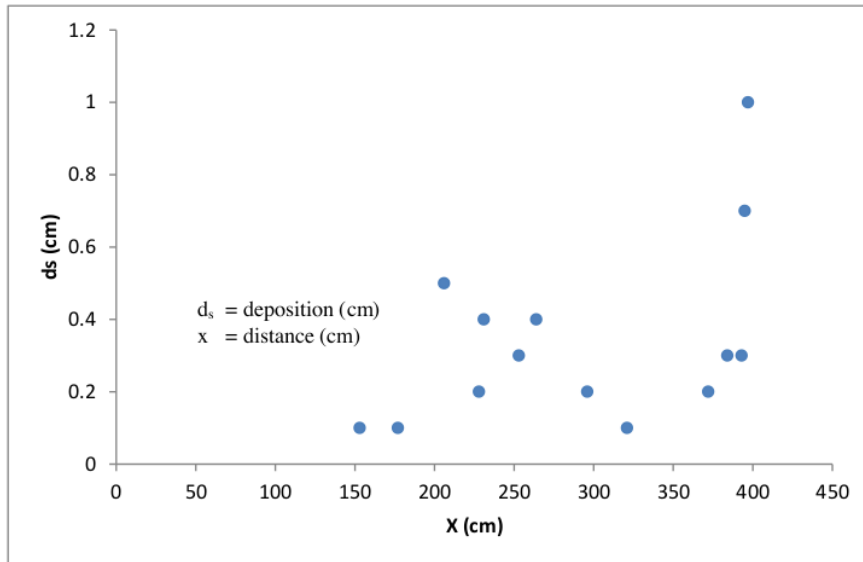


Fig. 7. Plotting The Results of the erosion depth (de) during the "running test" for 30 minutes



From Figure 7 with an experimental time of 30 minutes on the river estuary model, the erosion depth is 150 cm and then continues to decrease at a distance of 400 cm by 1.00 cm.

#### IV. CONCLUSION

The greatest sedimentation (deposition) that occurred was 0.4 cm at the experimental time for 20 minutes, and at the estuary of the Buah river model. It can be said that the longer the flow time there will be deposition (sedimentation) at the bottom of the Buah river with the dominant factors being an increase in velocity in the river ( $v$ ), grain diameter ( $d$ ).

#### REFERENCES

- [1] Achmad Syarifudin, 2022, "Sheet-Pile Foundation for Flood Control of Musi river Basin", International Journal of Innovative Science and Research Technology (IJISRT), Vol. 7, number 1, pp. 327-333
- [2] Achmad Syarifudin, 2022, "Erosion and Sedimentation Analysis of Rural Channels (RC) and Main Drainage Channels (MDC) on Tidal Lowland in Indonesia", International Journal of Innovative Science and Research Technology (IJISRT), Vol. 7, Number 1, pp. 419-426
- [3] Achmad Syarifudin, 2022, "Numerical Method Approach of Water Level Changes in Main Channel Jakabaring Sport City (JSC) Palembang, Indonesia", International Journal of Progressive Sciences and Technologies (IJPSAT), Vol. 30, Number 2, pp. 218-225
- [4] Achmad Syarifudin, 2022, "Prediction of The Depth Erosion in Rivers with Scale Models", International Journal of Progressive Sciences and Technologies (IJPSAT), Vol. 30, Number 2, pp. 123-130
- [5] Aureli F and Mignosa P, 2001, "Comparison between experimental and numerical results of 2D flows due to levee-breaking," XXIX IAHR Congress Proceedings, Theme C, September 16-21, Beijing, China.
- [6] Cahyono Ikhsan., 2017, "The effect of variations in flow rate on the bottom of an open channel with uniform flow", Civil Engineering Media.
- [7] Chandra Sucipta, Hari Wibowo, Danang Gunarto, 2019, "Analysis of river geometry on flow discharge in alluvial channels", JeLAST, Vol. 6 No. 3
- [8] Directorate General of Human Settlements, Ministry of Public Works. 2010. Procedures for Making Retention Ponds and Polders With Main Channels. Directorate General of Human Settlements, Ministry of Public Works. Jakarta.
- [9] Holdani Kurdi, Ulfa Fitriati, Robertus Chandrawidjaya, 2019, Hydraulic Models, Stomach Mangkurat University Press
- [10] Paimin et al, 2012, Watershed Management Planning System, Research and Development Center for Conservation and Rehabilitation (P3KR), Bogor, Indonesia
- [11] Okubo K, Muramoto Y, and Morikawa H, 1994, "Experimental Study on Sedimentation over the Flood plain due to River Embankment Failure," Bulletin of the Disaster Prevention Research Institute, Kyoto University, 44 (2), pp. 69-92
- [12] Robert. J. Kodoatie, Sugiyanto., 2002, Flood causes and methods of control in an environmental perspective, Yogyakarta
- [13] Syarifudin. A, 2017, "The influence of Musi River Sedimentation to The Aquatic Environment", DOI: 10.1051/mateconf/201710104026, MATEC Web Conf, 101, 04026, . [published online 09 March 2017]
- [14] Syarifudin A and Dewi Sartika, 2019, "A Scouring Patterns Around Pillars of Sekanak River Bridge", Journal of Physics: IOP Conference Series, volume 1167, 2019, IOP Publishing
- [15] Syarifudin. A, 2018, Hidrologi Terapan, Andi Publishers, Yogyakarta, p. 45-48
- [16] Syarifudin. A, 2018, Drainase Perkotaan Berwawasan Lingkungan, Andi Publisher, Yogyakarta, p. 38-42
- [17] Suripin., 2004, Sustainable Urban Drainage Systems, Andi Publishers, p. 176-179
- [18] Syarifudin A, HR Destania., "IDF Curve Patterns for Flood Control of Air Lakitan river of Musi Rawas Regency", IOP Conference Series: Earth and Environmental Science Volume 448, 2020, The 1st International Conference on Environment, Sustainability Issues and Community Development 23 - 24 October 2019, Central Java Province, Indonesia
- [19] Syarifudin A., 2014, "The 2nd International Conference on Informatics, Environment, Energy, and Applications (IEEA 2013)", Bali, Indonesia, March 16-17, 2013, JO CET (Journal of Clean Energy and Technology) Journal ISSN: 1793-821X Vol. 2, No. 1, January 2014
- [20] Wanshun Zhang, Yanhong Xu, Yanru Wang, and Hong Peng, 2014. "Modeling Sediment Transport and River Bed Evolution in River System", Journal of Clean Energy Technologies, Vol. 2, No. 2, April 2014

# Research on the Physical Model of River Sedimentation: A Case Study in Buah River, Palembang, Indonesia

## ORIGINALITY REPORT

14%

SIMILARITY INDEX

12%

INTERNET SOURCES

6%

PUBLICATIONS

5%

STUDENT PAPERS

## PRIMARY SOURCES

1	<a href="http://ijpsat.ijsht-journals.org">ijpsat.ijsht-journals.org</a> Internet Source	4%
2	<a href="http://ijera.com">ijera.com</a> Internet Source	3%
3	N Hidayat, D Purwantoro, Nur A Khoirudin. "The Effect of Check Dam Stones Installation and Gabions with Combination Variations in River Bends Using a Laboratory Model Test", IOP Conference Series: Earth and Environmental Science, 2021 Publication	2%
4	Achmad Syarifudin, Dewi Sartika. "A Scouring Patterns Around Pillars of Sekanak River Bridge", Journal of Physics: Conference Series, 2019 Publication	2%
5	<a href="http://www-numi.fnal.gov">www-numi.fnal.gov</a> Internet Source	2%
6	<a href="http://rie.binadarma.ac.id">rie.binadarma.ac.id</a> Internet Source	1%

---

7	<a href="http://eprints.binadarma.ac.id">eprints.binadarma.ac.id</a> Internet Source	1 %
8	<a href="http://www.medrxiv.org">www.medrxiv.org</a> Internet Source	1 %
9	Achmad Syarifudin. "The influence of Musi river sedimentation to the aquatic environment", MATEC Web of Conferences, 2017 Publication	1 %

---

---

Exclude quotes      On

Exclude matches      < 1%

Exclude bibliography      On